


# Ultra Slim-Q H88mm


## Modul Box Assembly Instruction

### Special Features:

- Length:270,300,350,400,450,500,550mm.
- The drawer side-board is 88mm high.
- Drawer width can be designed freely with automatic error adjustment.
- Hidden full pullout silencing sliding skid can bear 30kg and enjoys
- excellent stability and quite and smooth sliding performance.
- Quick installation and dismantle.
- Newly-designed built-in damper is free from reinstallation and ensures soft and smooth drawer movements.

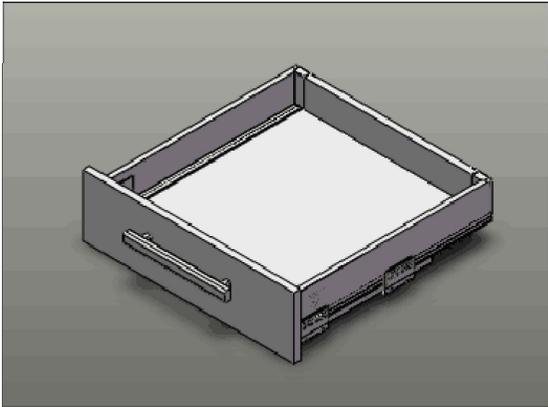

Basic length	Internally usable drawer depth	Minimum installation depth of drawer	Minimum installation height
270mm	244mm	270mm	111mm
300mm	274mm	300mm	111mm
350mm	324mm	350mm	111mm
400mm	374mm	400mm	111mm
450mm	424mm	450mm	111mm
500mm	474mm	500mm	111mm
550mm	524mm	550mm	111mm

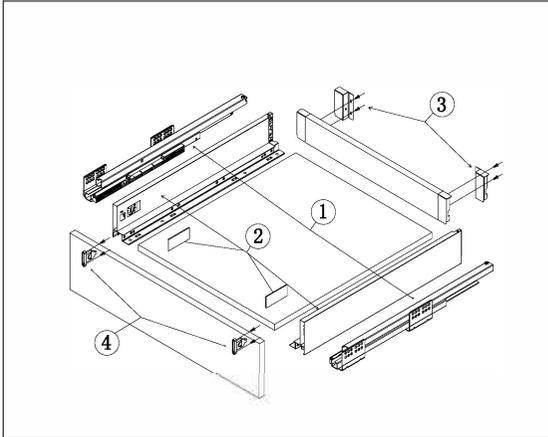


1. Guide Left/Right Length: 270mm, 300mm, 350mm, 400mm, 450mm, 500mm, 550mm

2. Drawer Side & Decorative Cap Left/Right Length: 270mm, 300mm, 350mm, 400mm, 450mm, 500mm, 550mm

3. Back connector Left / Right


4. Front connector Left / Right

### Technology pivot: Bottom and Back Panel Measurement 16MM Density Panel



- LW: Inside Cabinet Width
- 1 Bottom panel width=Inside Cabinet Width-75±0.5  
Bottom panel length=Runner length-24MM
  - 2 Back panel height= 84MM  
Back panel width=Inside Cabinet Width-87±0.5

### Runner Installation(mm)

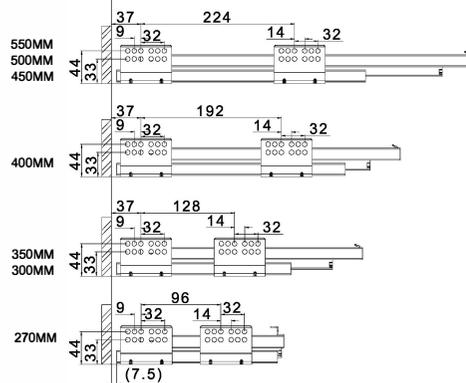

Basic length:270/300/350/400/450/500/550

